



BLACK MARBLE SLAP

71" x 100"

Finish

Polished

Thickness $\frac{3}{4}$ " (2 cm)**Cut style**


Vein Cut

PHYSICAL PROPERTIES

Property	Typical Values
Apparent Density	168 lb/ft ³
Water Absorption	0.20%
Compressive Strength	17,500 psi
Flexural Strength	2,000 psi
Modulus of Rupture	1,900 psi

Typical values may vary depending on quarry and stone lot.

DIMENSIONS

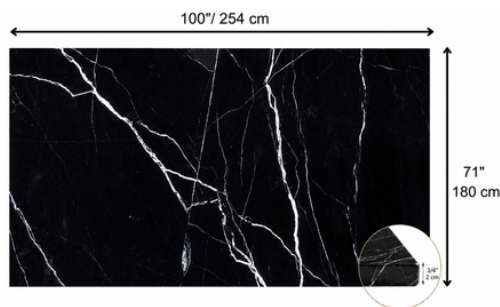

Illustrative image of the tile dimensions.

INSTALLATION NOTES

- Inspect all material prior to installation.
- Blend material from several crates to achieve optimal color and texture.
- Dry lay tiles before installation is recommended.
- Use white thin-set mortar suitable for natural stone.
- Installation constitutes acceptance of material.
- Claims for material installed will not be accepted.

PACKAGING INFORMATION

SQFT PER PIECE

49.3 sqft

SQFT PER PALLET

493 sqft

UNITS PER PALLET

10 pieces

WEIGHT PER PIECE

525 lb

WEIGHT PER PALLET

5,251 lb



Pallets are built with high-quality wood for safe transport and maximum protection.

CARE & MAINTENANCE

- Clean with a pH-neutral stone cleaner.
- Avoid acidic, bleach-based, or abrasive cleaners.
- Seal prior to grouting and re-seal periodically.

Important Note

This product is warranted to be free from defects in material and workmanship at the time of purchase.

For complete warranty details, please contact your supplier.

Scan the QR code to visit our website.



50 W. Mashta Dr. Suite 4
Miami, Florida 33149 USA



sales@balamst.com



balam-studio.com