



RECINTO GREY PAVER

4" x 8"

Finish

Natural

Thickness

3 3/16" (8 cm)

Material


Recinto

PHYSICAL PROPERTIES

Property	Typical Values
Apparent Density	170 lb/ft ³
Water Absorption	0.3%
Compressive Strength	30,000 psi
Flexural Strength	3,000 psi

Typical values may vary depending on quarry and stone lot.

DIMENSIONS

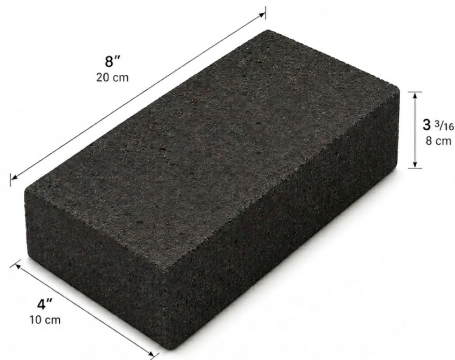

Illustrative image of the paver dimensions.

INSTALLATION

Suitable Installations

Sand-Set, Mortar-Set, or
Concrete Base Installation

Recommended Joint Width

1/8"–3/16" (3–5 mm)

Traffic Classification

Residential, Commercial,
Vehicular and Heavy Vehicular

PACKAGING INFORMATION

SQFT PER PIECE

0.2 sqft

SQFT PER PALLET

80 sqft

UNITS PER PALLET

360 pieces

WEIGHT PER PIECE

11 lb

WEIGHT PER PALLET

3,801 lb



Pallets are built with high-quality wood for safe transport and maximum protection.

CARE & MAINTENANCE

- Power wash surface
- Use paver-safe cleaners
- Re-apply joint sand
- Optional penetrating sealer recommended
- Avoid harsh de-icing chemicals

Important Note

This product is warranted to be free from defects in material and workmanship at the time of purchase.

For complete warranty details, please contact your supplier.

Scan the QR
code to visit
our website.



50 W. Mashta Dr. Suite 4
Miami, Florida 33149 USA



sales@balamst.com



balam-studio.com