



TRAVERTINE SLAPS

71" x 100"

Cut style

Cross Cut

Vein Cut

Thickness

3/4

Material

Travertine

AVAILABLE FINISHES

- **Honed:** A smooth, matte finish that enhances the stone's natural veining and tonal variations for an elegant, versatile appearance.
- **Sandblasted:** A lightly textured finish that enhances the stone's natural character while providing improved slip resistance.
- **Hammered:** A deeply textured finish that emphasizes the stone's natural beauty with a handcrafted look and strong architectural character.
- **Leather:** A silky-matte finish that preserves the stone's natural veining while providing visual depth, slip resistance, and low maintenance.
- **Polished:** A smooth, glossy finish that enhances the stone's natural veining and reflects light for a bright, sophisticated appearance.



Honed



Sandblasted



Hammered



Leather



Polished

Available in Vein Cut and Cross Cut. Depending on stone selection.

PACKAGING INFORMATION

SQFT PER PIECE

49.3 sqft

SQFT PER PALLET

493 sqft

UNITS PER PALLET

10 pieces

WEIGHT PER PIECE

525 lb


WEIGHT PER PALLET

5,251 lb



Pallets are built with high-quality wood for safe transport and maximum protection.

DIMENSIONS

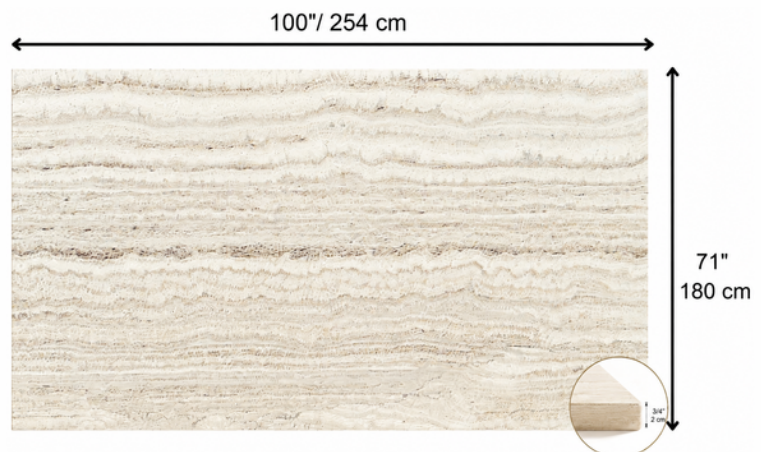

Illustrative image of the tile dimensions.



50 W. Mashta Dr. Suite 4
Miami, Florida 33149 USA



sales@balamst.com



balam-studio.com

FINISH APPLICATIONS

Finish	Interior Floors	Exterior Floors	Interior Walls	Exterior Walls	Wet Areas
Honed	✓	✓	✓	✓	✓
Polished	✓	⚠	✓	✓	✗
Leather	✓	✓	✓	✓	✓
Sandblasted	✓	✓	✓	✓	✓
Hammered	✓	✓	✓	✓	✓

Recommendations are based on typical applications. Final finish selection should consider slip resistance requirements, exposure conditions, maintenance expectations, and applicable local building codes.

PHYSICAL PROPERTIES

Property	Typical Values
Density	165 lb/ft ³
Water Absorption	0.35%
Compressive Strength	18,000 psi
Flexural Strength	2,100 psi
Modulus of Rupture	2,000 psi

Typical values may vary depending on quarry and stone lot.

MAINTENANCE



Dairy Cleaning:

Use neutral pH cleaners and soft mop.



Recommended Cleaners:

Stone soap or neutral pH stone cleaner.



Sealing Recommendations:

Apply a high-quality penetrating sealer before grouting and reseal periodically according to exposure conditions.



Acid Warning:

Acidic substances can etch and damage the surface of the stone.

PRODUCT CHARACTERISTICS

- Color variation is inherent to natural travertine.
- Natural veining and texture are unique to this product.
- Filled and unfilled pores are natural characteristics of travertine.
- Shade variation is expected.
- Every piece is unique and adds to the natural beauty of the installation.

INSTALLATION NOTES

- Inspect material before installation.
- Blend material from several boxes to achieve optimal color and texture.
- Dry lay before installation is recommended.
- Installation constitutes acceptance of material.
- Claims for material installed are not accepted.
- Use white thin-set mortar for light-colored stones when applicable.

Important Note

This product is warranted to be free from defects in material and workmanship at the time of purchase.

For complete warranty details, please contact your supplier.

Scan the QR code to visit our website.

